

NEW!



ULTRABOX

Ergonomics is within reach

**Now in
Push To Open
edition!**



load capacity
40 kg



full
extension



soft
close



push-open



synchronisation
of extension







3D
regulation







tested to 80.000
cycles

ULTRABOX

Front drawers

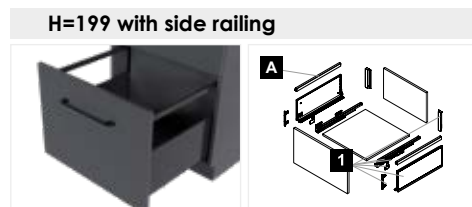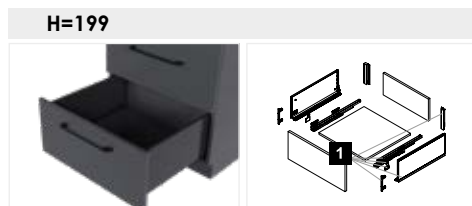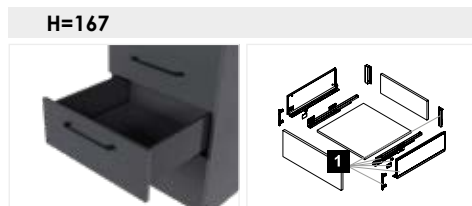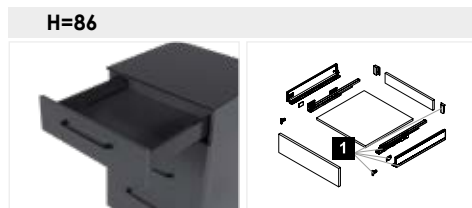

Internal drawers

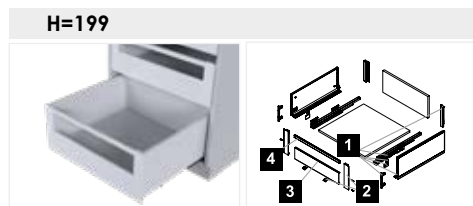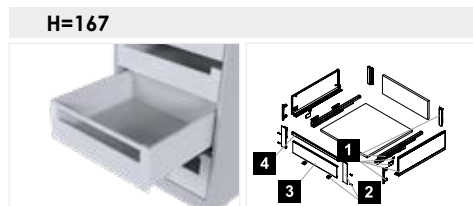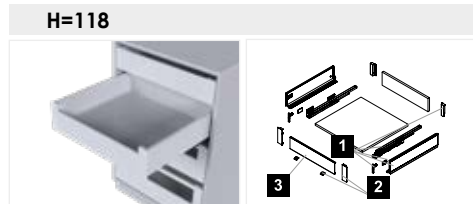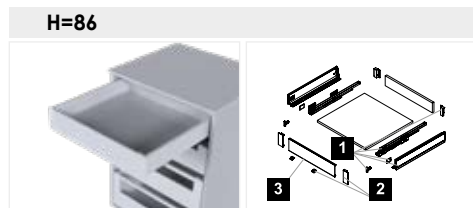

Characteristics



front



internal



86 mm



118 mm



167 mm



199 mm

available heights



nominal length of runners



load capacity



thin side



synchronisation of extension



quick installation



tested to 80.000 cycles



3D regulation



full extension



soft close



push-open



white and graphite

Information how to order

Front drawers choose one of indexes under no. **1**.

Internal drawers choose one of indexes soft close under no. **1**, **2**, **3** and for H=167 and 199 also **4**.

1 ULTRA BOX

runner + side + back panel fixing + end cap left / right



H=86			
NL	index soft close	index push-open	colour
300	TH03.1157.01	TH03.1208.01	003, 924
350	TH03.1158.01	TH03.1209.01	003, 924
400	TH03.1159.01	TH03.1210.01	003, 924
450	TH03.1160.01	TH03.1211.01	003, 924
500	TH03.1161.01	TH03.1212.01	003, 924
550	TH03.1162.01	TH03.1213.01	003, 924

H=118			
NL	index soft close	index push-open	colour
300	TH03.1163.01	TH03.1214.01	003, 924
350	TH03.1164.01	TH03.1215.01	003, 924
400	TH03.1165.01	TH03.1216.01	003, 924
450	TH03.1166.01	TH03.1217.01	003, 924
500	TH03.1167.01	TH03.1218.01	003, 924
550	TH03.1168.01	TH03.1219.01	003, 924

H=167			
NL	index soft close	index push-open	colour
300	TH03.1169.01	TH03.1220.01	003, 924
350	TH03.1170.01	TH03.1221.01	003, 924
400	TH03.1171.01	TH03.1222.01	003, 924
450	TH03.1172.01	TH03.1223.01	003, 924
500	TH03.1173.01	TH03.1224.01	003, 924
550	TH03.1174.01	TH03.1225.01	003, 924

H=199			
NL	index soft close	index push-open	colour
300	TH03.1175.01	TH03.1226.01	003, 924
350	TH03.1176.01	TH03.1227.01	003, 924
400	TH03.1177.01	TH03.1228.01	003, 924
450	TH03.1178.01	TH03.1229.01	003, 924
500	TH03.1179.01	TH03.1230.01	003, 924
550	TH03.1180.01	TH03.1231.01	003, 924

2 Front fixing

front fixing + front bracket left/right



H=86	
index	colour
TH03.1182.01	003, 924

H=118	
index	colour
TH03.1183.01	003, 924

H=167	
index	colour
TH03.1184.01	003, 924

H=199	
index	colour
TH03.1185.01	003, 924

3 Universal metal front for drawer H=86, 118, 167, 199

L=1200 mm, cutting template LW-98



index	colour
TH03.1181.01	003, 924

index	colour
TH03.1181.01	003, 924

4 Front railing for drawer H=167,199

L=1200 mm, cutting template LW-85



index	colour
TH03.1186.01	003, 924

index	colour
TH03.1186.01	003, 924

Additional accessories

A Rectangular railing

left/right



NL	index	colour
300	TH03.1238.01	003, 924
350	TH03.1239.01	003, 924
400	TH03.1240.01	003, 924
450	TH03.1232.01	003, 924
500	TH03.1233.01	003, 924
550	TH03.1241.0	003, 924

Synchronization of activation area

- A) bar L=1200 mm
- B) 2 pcs of fixings + 2 pcs of guides



set code (A+B)	fixings and guides code (B)
TH03.1235.00.000	TH03.1237.00.000

Internal drawer locker

locker + 2 pcs of bumpers




index	colour
TH03.1234.05	007, 013

i In a case of extra width of nominal length of slide (NL), it is necessary to use synchronizer to improve the operation of the push-open system by coordinating the mechanism of both slides.


Installation information

Needed space in cabinet

SOFT-CLOSE / PUSH TO OPEN WITHOUT SYNCHRONIZATION

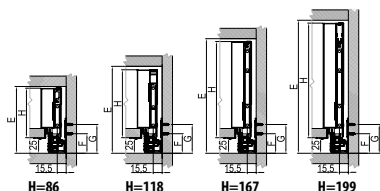


H	E (min.)	F (min.)	G (min.)	J (min.)	K	L
86	115				/	/
118	150				32	/
167	198	33	49	47,5	64	32
199	230				64	32




front fixing holes

Bottom and back panel

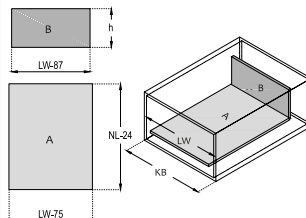


H	Back panel height	Back panel width
86	h=86 mm	LW-87 mm
118	h=118 mm	Drawer bottom length L=NL-24 mm
167	h=167 mm	Drawer bottom width
199	h=199 mm	LW-75 mm

PUSH TO OPEN WITH SYNCHRONIZATION

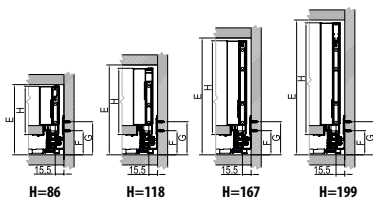

H	E (min.)	F (min.)	G (min.)	J (min.)	K	L
86	132				/	/
118	167				32	/
167	215	50	66	64,5	64	32
199	247				64	32




front fixing holes

Front (internal drawer)

Metal front for cutting

Rectangular railing for cutting



LW-98





LW-85



Installation dimension of slides

SOFT-CLOSE

Front drawer





Internal drawer



PUSH-OPEN


NL 300 / 350 / 400



* WITHOUT synchronization / ** WITH synchronization

Synchronizer

Bar of synchronizer of open extension area

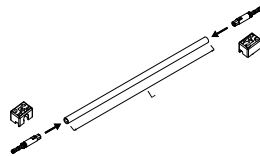

L=LW-128

KB - external cabinet width

LW - internal cabinet width

NL - długość nominalna prowadnic

H - nominal length of runners